CM 350 R290

FROZEN DICE

NUOVE TECNOLOGIE DEL FREDDO

Modular ice maker - Sprayer system
Daily production up to 155 kg

Position n°




Application fields

Hotel	●●●●●●●○	Fish market	○○○○○○○○
Restaurant	●●●●●●○○	Supermarket	○○○○○○○○
Fast food	●○○○○○○○	SPA	○○○○○○○○
Bar	●●●●●●●●	Medical	○○○○○○○○
Disco	●●●●●●●●	Industry	●○○○○○○○

Features & Plus

- Full cube, compact and crystalline
- Extrernal structure AISI 304 Scotch Brite
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Removable side panels
- ON-OFF switch
- Cabinet insulation HCFC free
- Removable and cleanable air filter
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C

Available dice size

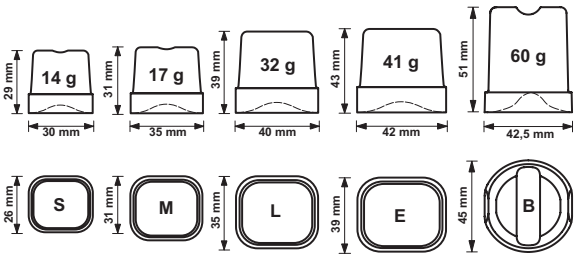

Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	7° C	155
21° C	15° C	150

Usable Bins

- Bin PE530
- Bin T420
- Bin T830

2 Years Warranty
subject to limitations

Certifications available for this model


NUOVE TECNOLOGIE DEL FREDDO
www.bremagroup.it
info@bremaicegroup.it

ECOMPANY

CM 350 R290

FROZEN DICE

Modular ice maker - Sprayer system
Daily production up to 155 kg

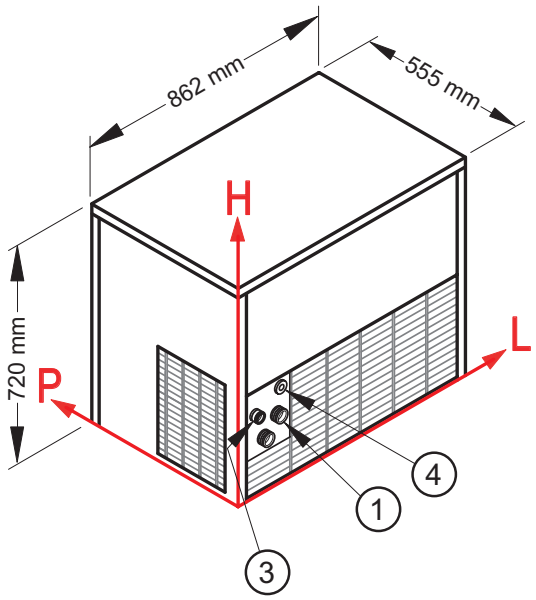

Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

Technical information

Production in 24h	150 kg
Cooling system	A -W
Kind of cube	14-17-32-41-60 g
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	1061 W
Fuse	16 A
Water consumption	A: 2 l/kg
	W: 15,8 l/kg
Sizes (L-P-H mm)	862 - 555 - 720
Sizes with pack (L-P-H mm)	945 - 645 - 980
Net weight	110 kg
Gross weight	128 kg
Finish	AISI 304 stainless steel, scotch brite

Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

① Water inlet:
129 mm - 183 mm - 3/4"

③ Water outlet:
65 mm - 285 mm - 24 mm

④ Electrical connection:
129 mm - 263 mm

All the technical information must be considered at the following conditions:

Standard Cube (17 g)	Ambient temperature +21° C	Water temperature +15° C	Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice
Rev. 04 - Issued March 2025