# Fresh Maker

Ice Cube



**Self-contained ice maker - Sprayer system**
**Daily production** up to **25 kg**

| | |
|---|---|
| Hotel | ■ |
| Restaurant | ■ |
| Fast food | ■ |
| Bar | ■ |
| Disco | ■ |
| Fish market | |
| Supermarket | |
| Medical & SPA | |
| Industry | ■ |

## ▶ Position n°





## ▶ Features & Plus

- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Cleanable antiscale filter
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Standard and special voltages
- Patented sprayer slide
- Fresh water dispenser





AISI 304 SS Scotch Brite finish



Cleanable antiscale filter



Patented sprayer slide



Fresh water dispenser

## ▶ Available ice cube size







## ▶ Prod. 24h

| | Air temp. | | Water temp. | | kg | lbs |
|---|---|---|---|---|---|---|
| | 10° C | 50° F | 7° C | 45° F | 25 | 55 |
| | 21° C | 70° F | 15° C | 60° F | 22 | 49 |

**2 Years Warranty**
subject to limitations

## ▶ Certifications available for this model


www.bremagroup.it
info@bremaicegroup.it

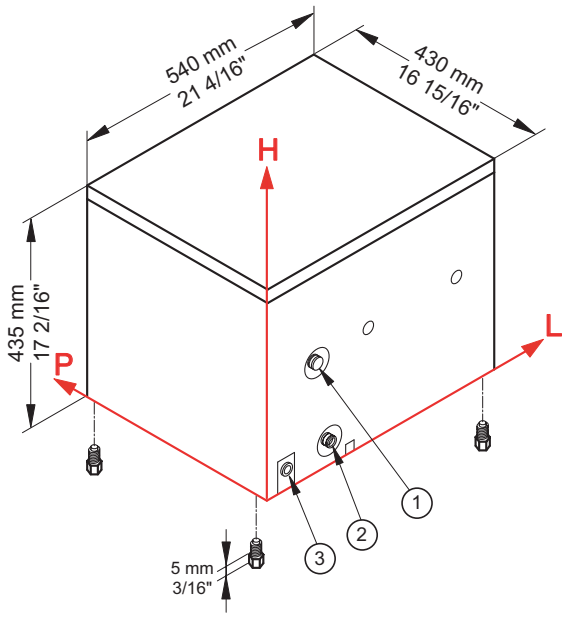

We are Brema

Ice Cube

# Fresh Maker

BREMA

## Self-contained ice maker - Sprayer system
## Daily production up to 25 kg




## ▶ Working conditions

- Location: **Indoor**

| | Min | Max |
|---|---|---|
| Ambient temperature | +10° C / +50° F | +43° C / 110° F |
| Water temperature | +3° C / +37° F | +32° C / +90° F |
| Voltage | -10% | +10% |
| Water inlet pressure | 1bar (14 psi) | 6bar (84 psi) |

## ▶ Performances

| Air temperature | Water temperature 7° C | 45° F | 15° C | 60° F | 21° C | 70° F |
|---|---|---|---|---|---|---|
| 10° C | 25 kg | | | | | |
| 50° F | | 55 lbs | | | | |
| 21° C | | | 22 kg | | | |
| 70° F | | | | 49 lbs | | |
| 32° C | | | | | 18 kg | |
| 90° F | | | | | | 40 lbs |

## ▶ Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

① Water in.: 120 mm / 4 12/16" - 215 mm / 8 7/16" - 3/4"
② Water out.: 150 mm / 5 14/16" - 40 mm / 1 9/16" - 24 mm / 15/16"
③ Electrical connections: 44 mm / 1 12/16" - 40 mm / 1 9/16"

## ▶ Technical information

| | |
|---|---|
| Production in 24h | 22 kg / 49 lbs |
| Store capacity, up to | 4 kg / 9 lbs |
| Cooling system | W |
| Kind of cube | D-13g |
| Refrigerant | R452A |
| Standard voltage | 220-240 V ~ 50 Hz |
| Average power consumption | 320 W |
| Fuse | 10 A |
| Delivered water | 1,2 l/min |

| | |
|---|---|
| Water consumption | W: 37,4 l/kg - 448,2 gal/100 lbs |
| Sizes (L-P-H mm) | 540 - 430 - 435 |
| (L-P-H in) | 21 4/16 - 16 15/16 - 17 2/16 |
| Sizes with pack (L-P-H mm) | 590 - 490 - 640 |
| (L-P-H in) | 23 4/16 - 19 5/16 - 25 3/16 |
| Net weight | 37,5 kg / 83 lbs |
| Gross weight | 42,5 kg / 94 lbs |
| Finish | AISI 304 stainless steel, scotch brite |

All the technical information must be considered at the following conditions:
Sizes without feet
Standard Cube (13 g)
Ambient temperature +21° C
Water temperature +15° C
Average power consumption at +43° C (standard voltage)

**Models and specifications are subject to change without notice**

Rev. 03 - Issued January 2025

BREMA
www.bremagroup.it
info@bremaicegroup.it
We are Brema