HIKU 26

Ice Cube



Self-contained ice maker - Sprayer system
Daily production up to 25 kg


Hotel	■■■■■■■■
Restaurant	■■■■■■■□
Fast food	■□□□□□□□
Bar	■■■■■■■■
Disco	■■■■■■■■
Fish market	□□□□□□□□
Supermarket	□□□□□□□□
Medical & SPA	□□□□□□□□
Industry	■□□□□□□□

▶ Features & Plus

- Compact and crystal cube
- Tropical class +43°C
- Cleanable antiscale filter
- Air cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Electromechanical operation
- ON-OFF rocker switch
- Standard and special voltages
- Patented sprayer slide
- Ice dispenser

▶ Position n°





Cleanable antiscale filter



Easy cleanable internal rounded surfaces



Patented sprayer slide



Ice dispenser

▶ Available ice cube size





▶ Prod. 24h

Air temp.		Water temp.		kg	lbs
10° C	50° F	7° C	45° F	25	55
21° C	70° F	15° C	60° F	22	49

2 Years Warranty
subject to limitations

▶ Certifications available for this model

www.bremagroup.it
info@bremaicegroup.it


We are Brema

Ice Cube

HIKU 26

BREMA

Self-contained ice maker - Sprayer system
Daily production up to 25 kg

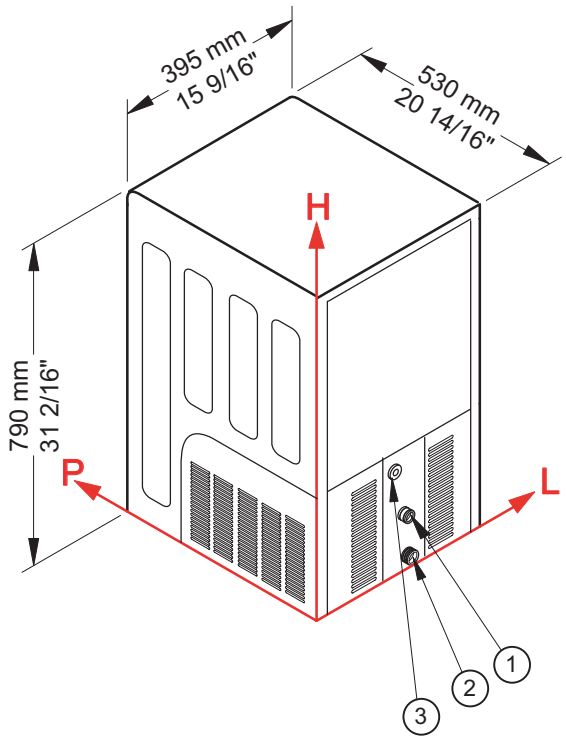

▶ Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

▶ Performances

Air temperature	Water temperature 7° C	45° F	15° C	60° F	21° C	70° F
10° C	25 kg					
50° F		55 lbs				
21° C			22 kg			
70° F				49 lbs		
32° C					18 kg	
90° F						40 lbs

▶ Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

① Water in.: 191 mm / 7 8/16" - 136 mm / 5 6/16" - 3/4"
② Water out.: 197 mm / 7 12/16" - 36 mm / 1 7/16" - 24 mm / 15/16"
③ Electrical connections: 175 mm / 6 14/16" - 211 mm / 8 5/16"

▶ Technical information

Production in 24h	22 kg / 49 lbs
Store capacity, up to	7 kg / 15 lbs
Cooling system	A
Kind of cube	D-13g
Refrigerant	R452A
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	285 W
Fuse	10 A
Delivered ice	1,3 kg/min

Water consumption	A: 4,5 l/kg - 53,9 gal/100 lbs
Sizes (L-P-H mm)	395 - 530 - 790
(L-P-H ")	15 9/16 - 20 14/16 - 31 2/16
Sizes with pack (L-P-H mm)	430 - 580 - 970
(L-P-H ")	16 15/16 - 22 13/16 - 38 3/16
Net weight	41 kg / 90 lbs
Gross weight	48 kg / 106 lbs
Finish	Polyethylene

All the technical information must be considered at the following conditions:
Sizes without feet
Standard Cube (13 g)
Ambient temperature +21° C
Water temperature +15° C
Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 03 - Issued January 2025

BREMA
www.bremagroup.it
info@bremaicegroup.it
We are Brema