IFT 165
R290

FROZEN TOUCH

NUOVE TECNOLOGIE DEL FREDDO

Self-contained ice maker - Paddle system
Daily production up to **90 kg**

• Position n°




• Application fields

Hotel	●●●	Fish market	
Restaurant	●●●●●	Supermarket	
Fast food	●	SPA	
Bar	●●●●●●	Medical	
Disco	●●●●	Industry	

• Features & Plus

- Hollow cube 20 gr
- Extrernal structure AISI 304 Scotch Brite
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Side grilles for better ventilation
- Removable side panels
- External protective filter, removable, easy to clean
- Water basin materials FDA approved
- Basin tipping safety system
- Automatic water charge
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- Adjustable Stainless Steel feet

• Available dice size



• Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	7° C	90
21° C	15° C	85
32° C	21° C	78

2 Years Warranty
subject to limitations

• Certifications available for this model

NUOVE TECNOLOGIE DEL FREDDO
www.bremagroup.it
info@bremaicegroup.it


ECOMPANY

IFT 165
R290

FROZEN TOUCH

NUOVE TECNOLOGIE DEL FREDDO

Self-contained ice maker - Paddle system
Daily production up to **90 kg**

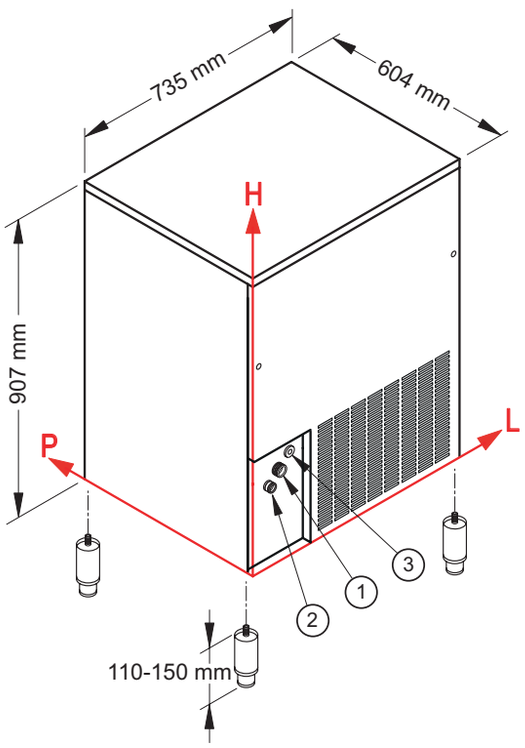

Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

① Water inlet:
126 mm - 180 mm - 3/4"

② Water outlet:
61 mm - 246 mm - 24 mm

③ Electrical connection:
126 mm - 280 mm

Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

Technical information

Production in 24h	**85 kg**
Store capacity, up to	**30 kg**
Cooling system	**A - W**
Kind of cube	**20 g**
Refrigerant	**R290**
Standard voltage	**220-240 V ~ 50 Hz**
Electrical consumption	**480 W**
Fuse	**10 A**
Water consumption	**A: 4 l/kg - W: 11,5 l/kg**
Sizes (L-P-H mm)	**735 - 604 - 907**
Sizes with pack (L-P-H mm)	**780 - 640 - 1070**
Net weight	**75 kg**
Gross weight	**87 kg**
Finish	**AISI 304 stainless steel, scotch brite**

All the technical information must be considered at the following conditions:

Sizes without feet	Standard Cube (20 g)	Ambient temperature +21° C	Water temperature +15° C	Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice
Rev. 03 - Issued January 2025