IFT 65
R290

FROZEN TOUCH

NUOVE TECNOLOGIE DEL FREDDO

Self-contained ice maker - Paddle system
Daily production up to **46 kg**

• Position n°




• Application fields

Hotel	●●●	Fish market	
Restaurant	●●●●●	Supermarket	
Fast food	●	SPA	
Bar	●●●●●●	Medical	
Disco	●●●●	Industry	

• Features & Plus

- Hollow cube 20 gr
- Extrernal structure AISI 304 Scotch Brite
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Side grilles for better ventilation
- Removable side panels
- External protective filter, removable, easy to clean
- Water basin materials FDA approved
- Basin tipping safety system
- Automatic water charge
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- Adjustable Stainless Steel feet
- Undercounter model

• Available dice size



• Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	7° C	46
21° C	15° C	35
32° C	21° C	30

2 Years Warranty
subject to limitations

• Certifications available for this model

NUOVE TECNOLOGIE DEL FREDDO
www.bremagroup.it
info@bremaicegroup.it


ECOMPANY

IFT 65
R290

FROZEN TOUCH

NUOVE TECNOLOGIE DEL FREDDO

Self-contained ice maker - Paddle system
Daily production up to **46 kg**

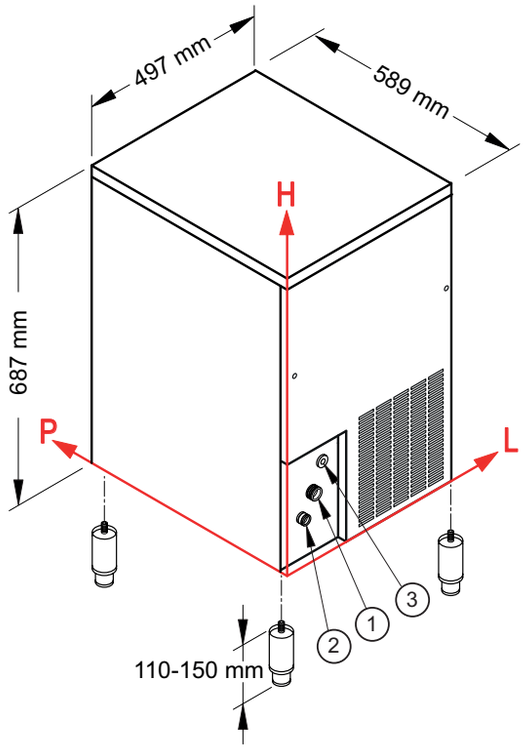

Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

Technical information

Production in 24h	35 kg
Store capacity, up to	15 kg
Cooling system	A - W
Kind of cube	20 g
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	400 W
Fuse	10 A
Water consumption	A: 3 l/kg W: 14 l/kg
Sizes (L-P-H mm)	497 - 589 - 687
Sizes with pack (L-P-H mm)	550 - 630 - 850
Net weight	47 kg
Gross weight	55 kg
Finish	AISI 304 stainless steel, scotch brite

Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

① Water inlet:
129 mm - 132 mm - 3/4"

② Water outlet:
56 mm - 154 mm - 24 mm

③ Electrical connection:
94 mm - 202 mm

All the technical information must be considered at the following conditions:

Sizes without feet | Standard Cube (20 g) | Ambient temperature +21° C | Water temperature +15° C | Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice
Rev. 03 - Issued January 2025