SL 80 NTC
R290

FROZEN DICE

Self-contained ice maker - Spayer system
Daily production up to 52 kg

Position n°




Application fields

Hotel	●	Fish market	
Restaurant	●	Supermarket	
Fast food	●	SPA	
Bar	●	Medical	
Disco	●	Industry	●

Features & Plus

- Full cube, compact and crystalline
- Extrernal structure AISI 304 Scotch Brite
- Side grilles for better ventilation
- Removable side panels
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- External protective filter, removable, easy to clean
- Adjustable Stainless Steel feet
- Undercounter model

Available dice size

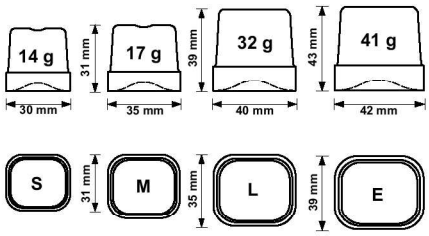

Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	7° C	52
21° C	15° C	49
32° C	21° C	42

2 Years Warranty
subject to limitations


Certifications available for this model

www.ntfice.it
info@bremaicegroup.it

SL 80 NTC R290

FROZEN DICE

Self-contained ice maker - Spayer system
Daily production up to 52 kg

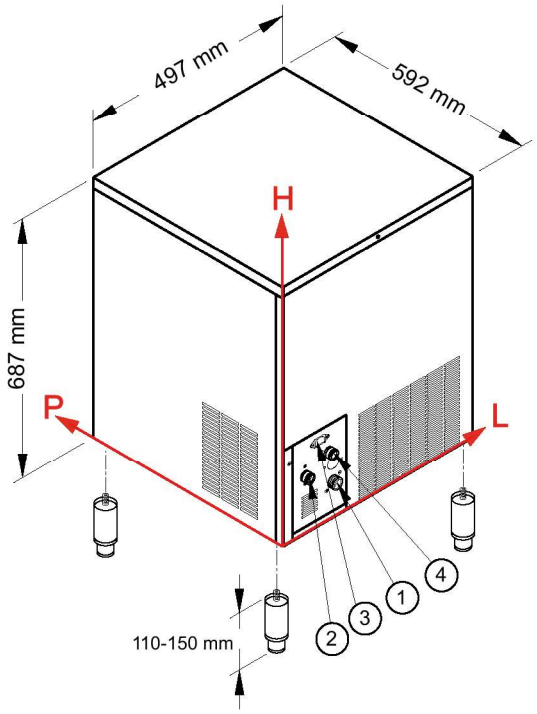

Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

Technical information

Production in 24h	49 kg
Store capacity, up to	16 kg
Cooling system	A - W
Kind of cube	14-17-32-41g
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	450 W
Fuse	10 A
Water consumption	A: 3 l/kg W: 15 l/kg
Sizes (l-P-H mm)	497 - 592 - 687
Sizes with pack (L-P-H mm)	550 - 660 - 860
Net weight	42 kg
Gross weight	48 kg
Finish	AISI 304 stainless steel, scotch brite

Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

① Water inlet:
130 mm - 95 mm - 3/4"

② Water outlet:
56 mm - 155 mm - 24 mm

③ Electrical connection:
95 mm - 225 mm

④ Condenser water inlet (only W):
119 mm - 181 mm - 3/4"

All the technical information must be considered at the following conditions:

Sizes without feet	Standard Cube (17 g)	Ambient temperature +21° C	Water temperature +15° C	Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice
Rev. 00 - Issued January 2026