Fronzen Dice

SL 110 R290 NTC

Frozen Qube

Self-contained ice maker - Sprayer system
Daily production up to 47 kg

Hotel	● ● ● ● ● ● ● ○
Restaurant	● ● ● ● ● ● ○ ○
Fast food	● ● ● ○ ○ ○ ○ ○
Bar	● ● ● ● ● ● ● ●
Disco	● ● ● ● ● ● ● ●
Fish markets	○ ○ ○ ○ ○ ○ ○ ○
Supermarkets	○ ○ ○ ○ ○ ○ ○ ○
Medical & SPA	● ● ○ ○ ○ ○ ○ ○
Industry	● ○ ○ ○ ○ ○ ○ ○



Available Drain Pump (DP) version

Hotel	● ● ● ● ● ● ● ○
Restaurant	● ● ● ● ● ● ○ ○
Fast food	● ● ● ○ ○ ○ ○ ○
Bar	● ● ● ● ● ● ● ●
Disco	● ● ● ● ● ● ● ●
Fish markets	○ ○ ○ ○ ○ ○ ○ ○
Supermarkets	○ ○ ○ ○ ○ ○ ○ ○
Medical & SPA	○ ○ ○ ○ ○ ○ ○ ○
Industry	○ ○ ○ ○ ○ ○ ○ ○



Available Drain Pump (DP) version

▶ Features & Plus

- Full cube, compact and crystalline
- External structure AISI 304 Scotch Brite
- Side grilles for better ventilation
- Removable side panels
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 °C
- External protective filter, removable, easy to clean
- Adjustable Stainless Steel feet
- Undercounter model

2 Years Warranty subject to limitations

▶ Certifications available for this model

www.ntfice.it
info@bremaicegroup.it


We are Brema Group

Frozen Dice

SL 110 R290 NTC

Frozen Qube

Self-contained ice maker - Sprayer system
Daily production up to **47 kg**

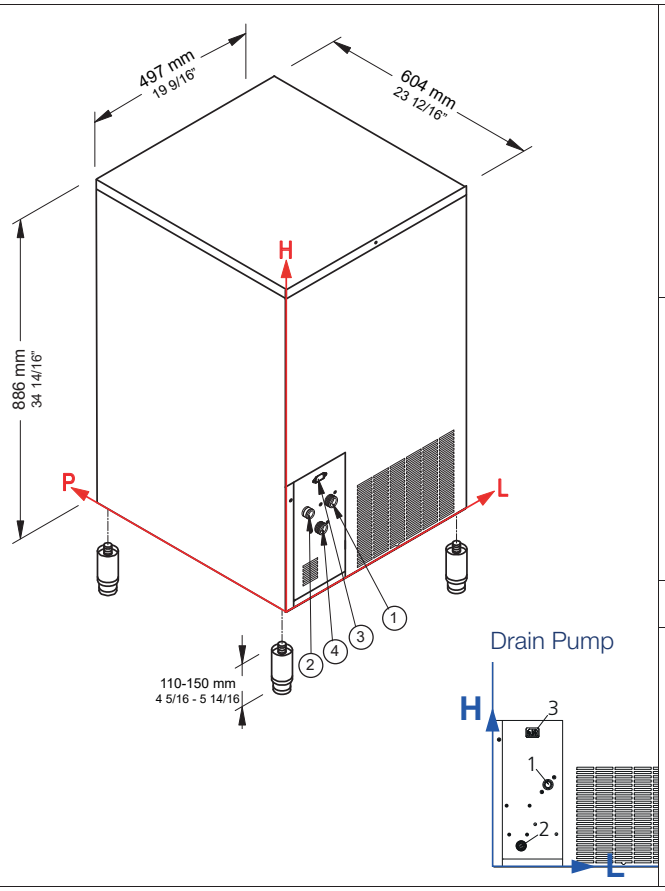


▶ Working conditions

• Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

▶ Available ice cube size

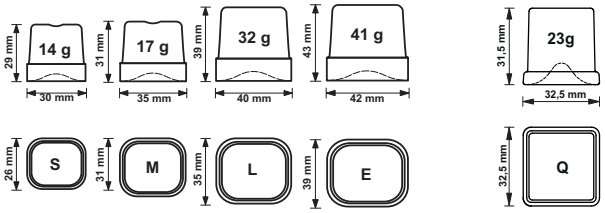

▶ Performances

Air temperature	Water temperature 7° C	45° F	15° C	60° F	21° C	70° F
10° C	47 kg					
50° F		104 lbs				
21° C			45 kg			
70° F				99 lbs		
32° C					38 kg	
90° F						84 lbs

▶ Connections standard version

① Water in.: 130mm / 5 2/16" - 240mm / 9 7/16" - 3/4"
② Water out.: 56m / 2 3/16" - 245mm / 9 10/16" - 24mm / 15/16"
③ Electrical connections: 95mm / 3 12/16" - 315mm/ 12 6/16"
④ Condenser water in. (only W):
93mm / 3 11/16" - 180mm / 7 1/16"- 3/4"

* Only for water cooling systems

Connections DP version

1 Water in.: 130mm / 5 2/16" - 190mm / 7 8/16 - 3/4"
2 Water out.: 66mm / 2 10/16" - 51mm / 2" - 24mm / 15/16"
3 Electrical connection: 95mm / 3 12/16" - 315mm / 12 6/16"

All measures are referred to the rear bottom-left corner (L-H-Ø)

▶ Technical information

Production in 24h	45 kg / 99 lbs
Store capacity, up to	25 kg / 55 lbs
Cooling system	A - W
Kind of cube	14-17-32-41g, Q-23g
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	460 W
Fuse	10 A
Electrical consumption	27 kWh/100kg

Water consumption	A: 4 l/kg - 47,9 gal/100 lbs
	W: 15 l/kg - 179,7 gal/100 lbs
Sizes (L-P-H mm)	497 - 604 - 886
(L-P-H in)	19 9/16 - 23 12/16 - 34 14/16
Sizes with pack (L-P-H mm)	550 - 660 - 1060
(L-P-H in)	21 10/16 - 26 - 41 12/16
Net weight	55 kg / 121 lbs
Gross weight	64 kg / 141 lbs
Finish	Stainless steel 18/8, scotch brite

All the technical information must be considered at the following conditions:
Sizes without feet
Standard Cube (17 g)
Ambient temperature +21° C
Water temperature +15° C
Electrical consumption at +32° C (standard voltage)
Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 00 - Issued February 2026

www.ntfice.it
info@bremaicegroup.it

We are NTF