Fronzen Dice

SL 280 R290 NTC

Frozen Qube

Self-contained ice maker - Sprayer system
Daily production up to 140 kg

Hotel	●●●●●●●●	●●●●●●●●
Restaurant	●●●●●●○○	●●●●●●○○
Fast food	●●●○○○○○	●●●○○○○○
Bar	●●●●●●●●	●●●●●●●●
Disco	●●●●●●●●	●●●●●●●●
Fish markets	○○○○○○○○	○○○○○○○○
Supermarkets	○○○○○○○○	○○○○○○○○
Medical & SPA	●●○○○○○○	○○○○○○○○
Industry	●○○○○○○○	○○○○○○○○



Available Drain Pump (DP) version



Available Drain Pump (DP) version

▶ Features & Plus

- Full cube, compact and crystalline
- Extrernal structure AISI 304 Scotch Brite
- Adjustable Stainless Steel feet
- Removable and cleanable air filter
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C

2 Years Warranty subject to limitations

▶ Certifications available for this model

NTF

www.ntfice.it
info@bremaicegroup.it


We are Brema Group


Frozen Dice

SL 280 R290 NTC

Frozen Qube

Self-contained ice maker - Sprayer system
Daily production up to **140 kg**

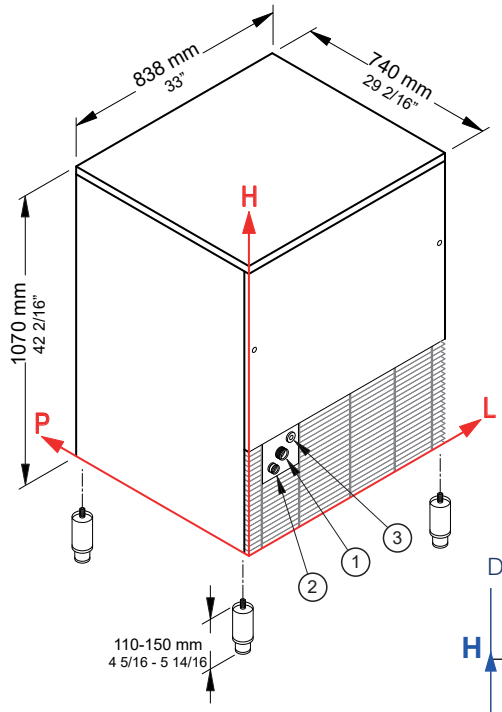




▶ Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

▶ Available ice cube size

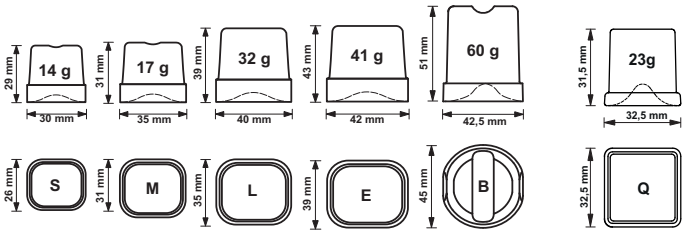

▶ Performances

Air temperature	Water temperature 7° C	45° F	15° C	60° F	21° C	70° F
10° C	140 kg					
50° F		309 lbs				
21° C			134 kg			
70° F				295 lbs		
32° C					122 kg	
90° F						269 lbs

▶ Connections standard version

① Water in.: 141mm / 5 9/16" - 290mm / 11 7/16" - 3/4"
② Water out.: 79mm / 3 2/16" - 245mm / 9 10/16" - 24mm 15/16"
③ Electrical connections: 186mm / 7 5/16" - 326mm/ 12 13/16"

Connections DP version

1 Water in.: 151mm / 5 15/16" - 209mm / 8 4/16 - 3/4"
2 Water out.: 92mm / 3 10/16" - 52mm / 2 1/16" - 24mm / 15/16"
3 Electrical connection: 165mm / 6 8/16" - 314mm / 12 6/16"

* Only for water cooling systems

All measures are referred to the rear bottom-left corner (L-H-Ø)

▶ Technical information

Production in 24h	134 kg / 295 lbs
Store capacity, up to	65 kg / 143 lbs
Cooling system	A - W
Kind of cube	14-17-32-41-60g, Q-23g
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	900 W
Fuse	16 A
Electrical consumption	23 kWh/100kg

Water consumption	A: 2 l/kg / 24,0 gal/100 lbs
	W: 17 l/kg / 203,7 gal/100 lbs
Sizes (L-P-H mm)	838 - 740 - 1070
(L-P-H in)	33 - 29 2/16 - 42 2/16
Sizes with pack (L-P-H mm)	880 - 785 - 1245
(L-P-H in)	34 10/16 - 30 14/16 - 49
Net weight	113 kg / 249 lbs
Gross weight	133 kg / 293 lbs
Finish	Stainless steel 18/8, scotch brite

All the technical information must be considered at the following conditions:
Sizes without feet
Standard Cube (17 g)
Ambient temperature +21° C
Water temperature +15° C
Electrical consumption at +32° C (standard voltage)
Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 00 - Issued February 2026

www.ntfice.it
info@bremaicegroup.it

We are NTF