Fronzen Dice

SL 35 R290

Self-contained ice maker - Sprayer system
Daily production up to 22 **kg**

Hotel	●	●	●	●	●	●	●	○
Restaurant	●	●	●	●	●	●	○	○
Fast food	●	●	●	○	○	○	○	○
Bar	●	●	●	●	●	●	●	●
Disco	●	●	●	●	●	●	●	●
Fish markets	○	○	○	○	○	○	○	○
Supermarkets	○	○	○	○	○	○	○	○
Medical & SPA	●	●	○	○	○	○	○	○
Industry	●	○	○	○	○	○	○	○



▶ Features & Plus

- Full cube, compact and crystalline
- Extrernal structure AISI 304 Scotch Brite
- External structure ABS (on demand)
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Cleaning system
- Cleanable antiscale filter
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- Undercounter model

2 Years Warranty subject to limitations

▶ Certifications available for this model


www.ntfice.it
info@bremaicegroup.it

We are Brema Group

Frozen Dice

SL 35 R290

Self-contained ice maker - Sprayer system
Daily production up to 22 **kg**

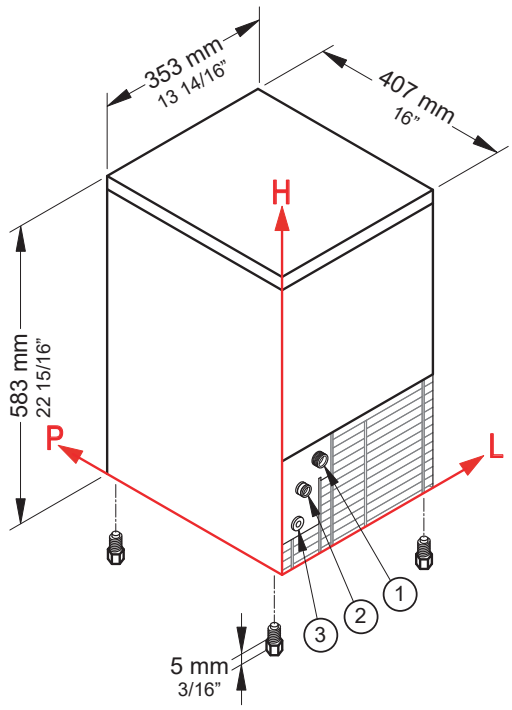



Working conditions

• Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

▶ Available ice cube size





▶ Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	22 kg					
	50° F		49 lbs				
	21° C			20 kg			
	70° F				44 lbs		
	32° C					16 kg	
	90° F						35 lbs

▶ Connections standard version

① Water in.: 88mm / 3 7/16" - 184mm / 7 4/16" - 3/4"
② Water out.: 45mm / 1 12/16" - 138mm / 5 7/16" - 24mm / 15/16"
③ Electrical connections: 41mm / 1 10/16" - 73mm/ 2 14/16"

All measures are referred to the rear bottom-left corner (L-H-Ø)

▶ Technical information

Production in 24h	20 kg / 44 lbs
Store capacity, up to	4 kg / 9 lbs
Cooling system	A - W
Kind of cube	14 g
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	260 W
Fuse	10 A
Electrical consumption	35 kWh/100kg

Water consumption	A: 4 l/kg - 47,9 gal/100 lbs
	W: 27 l/kg - 323,5 gal/100 lbs
Sizes (L-P-H mm)	353 - 407 - 583
(L-P-H in)	13 14/16 - 16 - 22 15/16
Sizes with pack (L-P-H mm)	415 - 445 - 780
(L-P-H in)	16 5/16 - 17 8/16 - 30 11/16
Net weight	27,5 kg / 61 lbs
Gross weight	34 kg / 75 lbs
Finish	Stainless steel 18/8, scotch brite

All the technical information must be considered at the following conditions:
Sizes without feet
Standard Cube (14 g)
Ambient temperature +21° C
Water temperature +15° C
Electrical consumption at +32° C (standard voltage)
Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 00 - Issued February 2026

www.ntfice.it
info@bremaicegroup.it

We are NTF