CV 950

FROZEN RUN

NUOVE TECNOLOGIE DEL FREDDO

Modular ice maker - Vertical evaporator system
Daily production up to **414 kg**

Position n°




Application fields

Hotel	●●	Fish market	
Restaurant	●	Supermarket	
Fast food	●●●●●●●●	SPA	
Bar	●●	Medical	
Disco	●●●●●●	Industry	

Features & Plus

- Flat cube 7 gr crystalline and compact
- Our vertical evaporator provides separated cubes
- Extrernal structure AISI 304 Scotch Brite
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- ON-OFF switch
- Removable air filter for easy cleaning
- Washing system
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C

Available dice size



Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	10° C	414
21° C	15° C	400
32° C	21° C	334

Usable Bins

- Bin PE530
- Bin T420
- Bin T830
- RB 280

2 Years Warranty
subject to limitations

Certifications available for this model

NUOVE TECNOLOGIE DEL FREDDO

www.bremagroup.it
info@bremaicegroup.it


ECOMPANY

CV 950

FROZEN RUN

NUOVE TECNOLOGIE DEL FREDDO

Modular ice maker - Vertical evaporator system
Daily production up to 414 kg

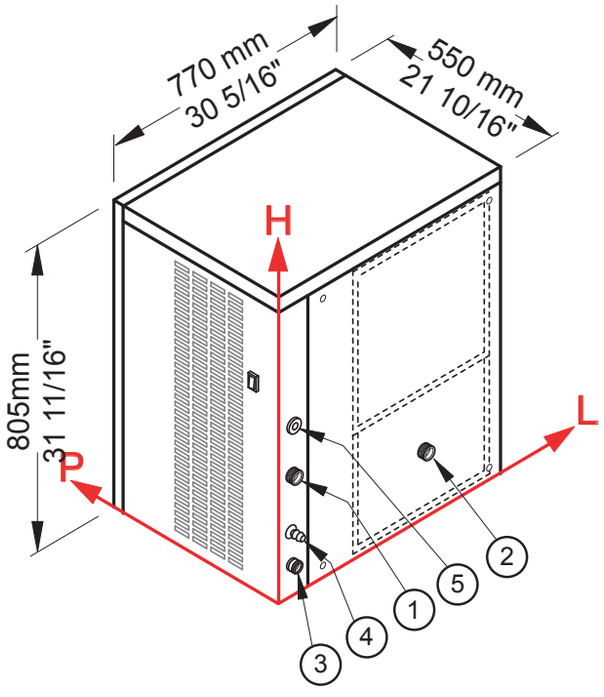

Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

① Water inlet:
38 mm - 252 mm - 3/4"

② Condenser water inlet:
375 mm - 115 mm - 3/4"

③ Water outlet:
32 mm - 40 mm - 24 mm

④ Condenser water outlet:
28 mm - 93 mm - 12 mm

⑤ Electrical connections:
33 mm - 323 mm

②④ Only for water cooling systems

Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

Technical information

Production in 24h	400 kg
Cooling system	A - W
Kind of cube	7 g
Refrigerant	R452A
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	3000 W
Fuse	32 A
Water consumption	A: 1,8 l/kg W: 13 l/kg
Sizes (L-P-H mm)	770 - 550 - 805
Sizes with pack (L-P-H mm)	815 - 615 - 980
Net weight	113 kg
Gross weight	124 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:

Standard Cube (7 g)	Ambient temperature +21° C	Water temperature +15° C	Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice
Rev. 03 - Issued January 2025