IC 18

Ice Cube



Self-contained ice maker - Sprayer system
Daily production up to 25 kg

Hotel	■■■■■■■■
Restaurant	■■■■■■■□
Fast food	■□□□□□□□
Bar	■■■■■■■■
Disco	■■■■■■■■
Fish market	□□□□□□□□
Supermarket	□□□□□□□□
Medical & SPA	□□□□□□□□
Industry	■□□□□□□□

▶ Position n°




▶ Features & Plus


- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Cleanable antiscale filter
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Standard and special voltages
- Patented sprayer slide
- Suitable for embedment



AISI 304 SS Scotch Brite finish



Cleanable antiscale filter



Disappearing insulated door



Patented sprayer slide

▶ Available ice cube size





▶ Prod. 24h

	Air temp.		Water temp.		kg	lbs
	10° C	50° F	7° C	45° F	25	55
	21° C	70° F	15° C	60° F	22	49

2 Years Warranty
subject to limitations

▶ Certifications available for this model

www.bremagroup.it
info@bremaicegroup.it


We are Brema

Ice Cube

IC 18

BREMA

Self-contained ice maker - Sprayer system
Daily production up to 25 kg

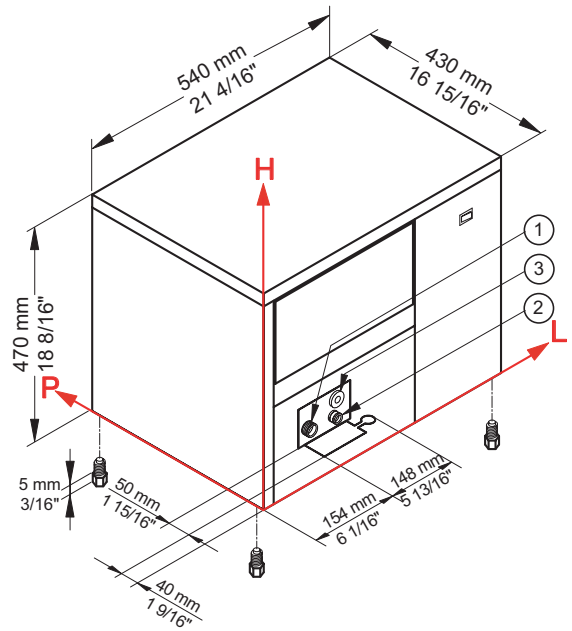

▶ Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

▶ Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	25 kg					
	50° F		55 lbs				
	21° C			22 kg			
	70° F				49 lbs		
	32° C					18 kg	
	90° F						40 lbs

▶ Connections

All measures are referred to the rear bottom-left corner

① Water in.: 3/4" Ø
② Water out.: 24 mm / 15/16" Ø
③ Electrical connections

▶ Technical information

Production in 24h	22 kg / 49 lbs
Store capacity, up to	4 kg / 9 lbs
Cooling system	A
Kind of cube	D-13g
Refrigerant	R452A
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	320 W
Fuse	10 A

Water consumption	A: 4,5 l/kg - 53,9 gal/100 lbs
Sizes (L-P-H mm)	540 - 430 - 470
(L-P-H in)	21 4/16 - 16 15/16 - 18 8/16
Sizes with pack (L-P-H mm)	590 - 490 - 640
(L-P-H in)	23 4/16 - 19 5/16 - 25 3/16
Net weight	34 kg / 75 lbs
Gross weight	39 kg / 86 lbs
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:
Sizes without feet
Standard Cube (13 g)
Ambient temperature +21° C
Water temperature +15° C
Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 03 - Issued January 2025