IMF 26

Ice Finger



Self-contained ice maker - Paddle system
Daily production up to 28 kg

Hotel	■
Restaurant	■
Fast food	■
Bar	■
Disco	■
Fish market	
Supermarket	
Medical & SPA	
Industry	

▶ Position n°



▶ Features & Plus

- Hollow cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Removable and cleanable air filter
- Air or water cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- FDA approved - ABS water basin
- Basin tipping safety system
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Automatic water charge
- Standard and special voltages




AISI 304 SS Scotch Brite finish



Removable and cleanable air filter




FDA approved - ABS water basin



Disappearing insulated door

▶ Available ice cube size



▶ Prod. 24h

Air temp.		Water temp.		kg	lbs
10° C	50° F	7° C	45° F	28	62
21° C	70° F	15° C	60° F	25	55

2 Years Warranty
subject to limitations

▶ Certifications available for this model

www.bremagroup.it
info@bremaicegroup.it

We are Brema




Ice Finger

IMF 26

BREMA

Self-contained ice maker - Paddle system
Daily production up to 28 kg

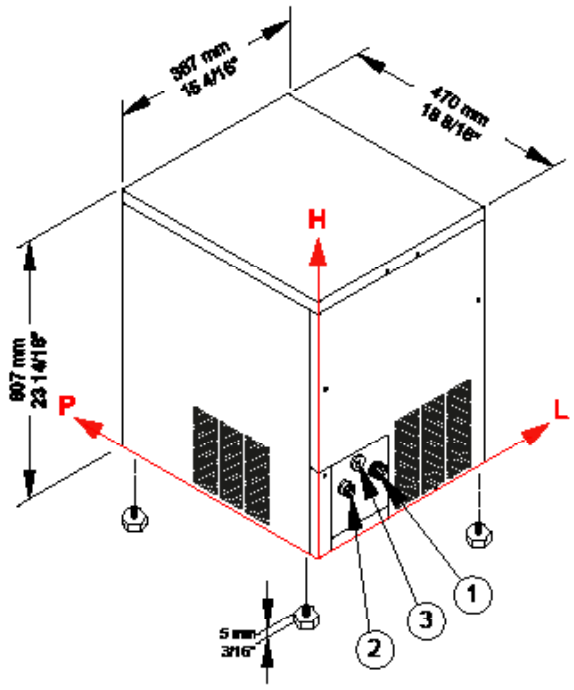

▶ Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

▶ Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	28 kg					
	50° F		62 lbs				
	21° C			25 kg			
	70° F				55 lbs		
	32° C					17 kg	
	90° F						37 lbs

▶ Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

① Water in.: 129 mm / 5 1/16" - 137 mm / 5 6/16" - 3/4"
② Water out.: 56 mm / 2 3/16" - 137 mm / 5 6/16" - 24 mm / 15/16"
③ Electrical connections: 89 mm / 3 8/16" - 180 mm / 7 1/16"

▶ Technical information

Production in 24h	25 kg / 55 lbs
Store capacity, up to	4 kg / 9 lbs
Cooling system	A - W
Kind of cube	A-20g
Refrigerant	R452A
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	255 W
Fuse	10 A
Finish	AISI 304 stainless steel, scotch brite

Water consumption	A: 4,5 l/kg - 53,9 gal/100 lbs
	W: 15,5 l/kg - 185,7 gal/100 lbs
Sizes (L-P-H mm)	387 - 470 - 607
(L-P-H in)	15 4/16 - 18 8/16 - 23 14/16
Sizes with pack (L-P-H mm)	440 - 520 - 770
(L-P-H in)	17 5/16 - 20 8/16 - 30 5 /16
Net weight	36 kg / 79 lbs
Gross weight	42 kg / 93 lbs

All the technical information must be considered at the following conditions:
Sizes without feet
Standard Cube (20 g)
Ambient temperature +21° C
Water temperature +15° C
Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 03 - Issued January 2025